

# SHED FELT


Waterproof bituminous glass fibre membrane

- Used on garden sheds, hutches & kennels
- Fixed using nails and felt adhesive
- Quick and easy to install (instructions on reverse)
- Life expectancy 5 years

Manufactured in the UK for Radmat Building Products Ltd, Holland House Valley Way, Rockingham Road, Market Harborough, Leicestershire, LE16 7PS.  
Hotline number +44 (0) 1452 203276, E-Mail: [technical@radmatbm.com](mailto:technical@radmatbm.com)



Declaration of Performance (DOP) available at [www.radmatbm.com](http://www.radmatbm.com)

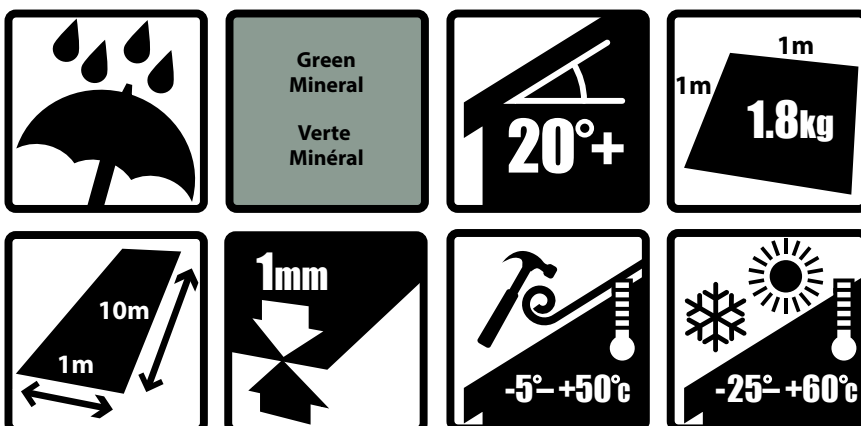

## Declaration of Performance

**EANNumbers:** 5060382232791, 5060382232937

**ReferenceNumbers:** 800351, 800462

**Factory Product on Control Certificate Number:** 0809-CPR-21000631

**1. Product Group:**

Glass Shed Felt

**2. Unique Product Name / Codes:**

Roof Pro 5 Year Roof Membrane Green (5060382232791, 5060382232937)

**3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:**

Roof waterproofing. For use on apex and pent roofed non-habitable garden buildings and animal shelters, either mechanically fixed and/or adhered with felt adhesive. A glass fibre carrier based modified bitumen roofing membrane finished with a fine grade green slate granule upper surface to aid UV protection.

**4. Manufacturer:**

Radmat Building Products Ltd,  
Holland House,  
Valley Way,  
Rockingham Road,  
Market Harborough,  
LE16 7PS,  
United Kingdom

**5. Authorised Representative:**

Radmat (Ireland) Limited, 3 Inns Quay, Dublin 7, Ireland

**6. System or systems of assessment and verification of constancy of performance of the construction product as set out in the Annex V of the CPR:**

System 2+

**7. Notified Body:**

The British Board of Agreement (BBA) performed an initial inspection of the manufacturing plant and factory production control, and performs continuous surveillance, assessment and evaluation of factory production control under system 2+ and issued a certificate of conformity of factory production control with reference to **BS EN 13707:2013** and **The Construction Products (Amendment etc.) (EU Exit) Regulations 2020**.

**8. Not applicable.**

## Declaration of Performance

### 9. Declared Performance:

\*tolerance of >150mm

\*\*tolerance of +/-1.5%

\*\*\*tolerance of +/-7.5%

Characteristic	Specific Test ref.	Declared Performance	Harmonised Standard (hEN)
Roll length*	BS EN 1848-1	10m	BS EN 13707:2013 for all
Roll width**	BS EN 1848-1	1m	
Weight***	BS EN 1849-1	18kg	
Watertightness	BS EN 1928 method a.	PASS	
Tensile strength:****	BS EN 12311-1	490 N/50mm	
Longitudinal		330 N/50mm	
Transverse	BSEN 12311-1		
Elongation at maximum load:			
Longitudinal		3%	
Transverse		3%	
Resistance to tearing:****	BS EN 12310-1		
Longitudinal		65 N	
Transverse		70 N	
Flexibility at low temperature	BS EN 1109	NPD	
Durability	BS EN 1296	NPD	
Straightness	BS EN 1848-1	PASS	
Visible Defects	BS EN 1850-1	PASS	
External Fire Performance	BS EN13501-5	F <sub>ROOF</sub> (T4)	
Reaction to Fire	BS EN13501-1	F	

\*\*\*\*tolerance of +/-15%

**10. The performance of the product identified in 1. and 2. above is in conformity with the declared performance stated in 9.**

Signed by and on behalf of the supplier by:



**Robert Speroni**  
 Managing Director  
 January 2021

## Declaration of Performance

**EANNumbers:** 5060382232791, 5060382232937

**ReferenceNumbers:** 800351, 800462

**Factory Product on Control Certificate Number:** 0809-CPR-21000631

**1. Product Group:**

Glass Shed Felt

**2. Unique Product Name / Codes:**

Roof Pro 5 Year Roof Membrane Green (5060382232791, 5060382232937)

**3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:**

Roof waterproofing. For use on apex and pent roofed non-habitable garden buildings and animal shelters, either mechanically fixed and/or adhered with felt adhesive. A glass fibre carrier based modified bitumen roofing membrane finished with a fine grade green slate granule upper surface to aid UV protection.

**4. Manufacturer:**

Radmat Building Products Ltd,  
Holland House,  
Valley Way,  
Rockingham Road,  
Market Harborough,  
LE16 7PS,  
United Kingdom

**5. Authorised Representative:**

Radmat (Ireland) Limited, 3 Inns Quay, Dublin 7, Ireland

**6. System or systems of assessment and verification of constancy of performance of the construction product as set out in the Annex V of the CPR:**

System 2+

**7. Notified Body:**

FPC Certificate obtained from Eurofins Expert Services OY, EU Notified Body registered under registration number 0809 with reference to **EN 13707:2004+A2:2009** and **CPR 305/2011/EU**.

**8. Not applicable.**

## Declaration of Performance

### 9. Declared Performance:

\*tolerance of  $\geq 150\text{mm}$

\*\*tolerance of  $\pm 1.5\%$

\*\*\*tolerance of  $\pm 7.5\%$

Characteristic	Specific Test ref.	Declared Performance	Harmonised Standard (hEN)
Roll length*	EN 1848-1	10m	EN 13707:2004+A2:2009 for all
Roll width**	EN 1848-1	1m	
Weight***	EN 1849-1	18kg	
Watertightness	EN 1928 method a.	PASS	
Tensile strength:**** Longitudinal Transverse Elongation at maximum load: Longitudinal Transverse	EN 12311-1  EN 12311-1	490 N/50mm 330 N/50mm  3% 3%	
Resistance to tearing:**** Longitudinal Transverse	EN 12310-1	65 N 70 N	
Flexibility at low temperature	EN 1109	NPD	
Durability	EN 1296	NPD	
Straightness	EN 1848-1	PASS	
Visible Defects	EN 1850-1	PASS	
External Fire Performance	EN13501-5	F <sub>ROOF</sub> (T4)	
Reaction to Fire	EN13501-1	F	

\*\*\*\*tolerance of  $\pm 15\%$

### 10. The performance of the product identified in 1. and 2. above is in conformity with the declared performance stated in 9.

Signed by and on behalf of the supplier by:



**Robert Speroni**  
Managing Director  
January 2021